
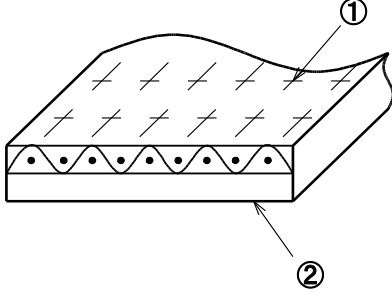


Technical Data Sheet		SEB™			
		Belt type	SE-F100-SBUK		
Applications		Low and accurate torque transmission. Sandwich conveyance. Automatic teller machines.			
Item		Description		Remarks	
Specification	Construction			① Polyester seamless fabric ② Black millable urethane rubber (Ground surface)	
	Antistatic	Yes			
Dimensions	Width	5 to 200 mm			
	Length	96.5 to 1560 mm		By molds	
	Thickness	0.8 mm			
	Joint	Seamless			
Properties	Tensile strength	44.1 N/mm width		Test speed : 15 %/min.	
	Elongation at break	0		Ambient condition: 23°C, 50%R.H.	
	Standard elongation	1 to 3%			
	Tension at 2%	4.3 N/mm width		Ambient condition: 23°C, 50%R.H.	
	Minimum pulley dia.	10 mm			
	Operating temp.	-20 to +60 °C			
	Coefficient of friction	Ground surface	0.1 to 0.3		Against PPC Ambient condition: 23°C, 50%R.H.
		Glossy surface	0.4 to 0.8		Against Stainless steel or aluminium Ambient condition: 23°C, 50%R.H.
Mass	0.8 kg/m ²				
Features	Wear resistance. Oil resistance. Convey side is low c.o.f surface.				