
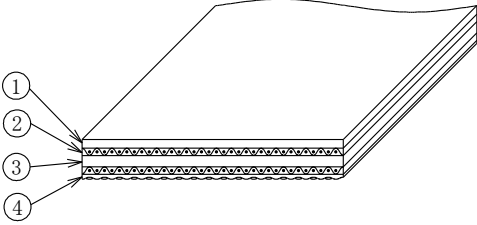


Technical Data Sheet P-146		NITTA BELT POLY		
		Belt type	HU-250	
Applications				
Item	Description	Remarks		
Specification	Construction			①Hard PU (Flat surface, Green) ②PA Fabric ③PA Film ④NBR (Textured Pattern, Green)
	Antistatic	Yes		
Dimensions	Width	6 to 305 [mm]		
	Length	300 to 105,000 [mm]		
	Thickness	1.3 [mm]		
	Joint	Skived joint Adhesive Polybond A and E		
	Tensile strength	60 [N/mm]		Test speed: 50mm/min
Properties	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 [%]		
	Tension at 1 [%]	1.5 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	20 [mm]		
	Operating temp.	-20 to +80°C		
	Coefficient of friction	0.3 to 0.4(Steel) (PU side) 0.5 to 0.6(Steel) (NBR side)		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.6 [kg/m ²]		
Features				