
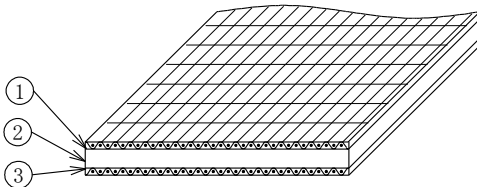


Technical Data Sheet P-272		NITTA BELT POLY		
		Belt type	TTA-250N	
Applications				
Item		Description		Remarks
Specification	Construction			①PA Fabric (Blue) ②PA Film ③PA Fabric (Blue)
	Dimensions	Antistatic	No	
	Width	6 to 305 [mm]		
	Length	300 to 105000 [mm]		
	Thickness	1.0 [mm]		
	Joint	Skived joint Adhesive Polybond A		
Properties	Tensile strength	60 [N/mm]		Test speed: 50mm/min
	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 [%]		
	Tension at 1 [%]	1.5 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	25 [mm]		
	Operating temp.	-20 to +80°C		
	Coefficient of friction	0.2 to 0.25(Steel) (Both side)		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	0.9 [kg/m ²]		
Features				

Industrial Products Div.