
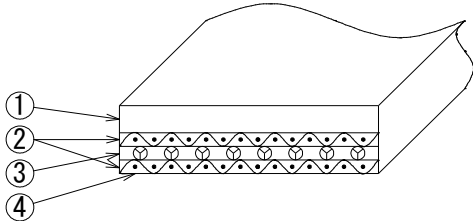


Technical Data Sheet		SEB™		
		Belt type	SE-A-WN	
Applications		<ul style="list-style-type: none"> <li>• Feeder belts</li> <li>• Sack machines</li> </ul>		
Item		Description		Remarks
Specification	Construction			<ul style="list-style-type: none"> <li>① White natural rubber (Ground surface)</li> <li>② Polyamide fabric</li> <li>③ Polyester cord</li> <li>④ White chloroprene rubber (Glossy surface)</li> </ul>
	Antistatic	No		
Dimensions	Width	7 to 400 [mm]		
	Length	400 to 1970 [mm]		By molds
	Thickness	8.0 [mm]		Thickness available 2 to 12 mm
	Joint	Seamless		
Properties	Tensile strength	58.8 [N/mm]		Test speed: 10%/min.
	Elongation at break	10 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.5 [%]		
	Tension at 0.5 [%]	3.7 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	80 [mm]		
	Operating temp.	-20 to +60 [°C]		
	Coefficient of friction	Approx. 2.0(Steel) Ground surface 0.2 to 0.4(Steel) Glossy surface		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	10.2 [kg/m <sup>2</sup> ]		
Features	<ul style="list-style-type: none"> <li>• High friction</li> <li>• Soft surface</li> </ul>			