
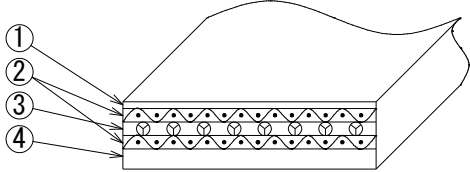


Technical Data Sheet		SEB™		
		Belt type	SE-D-PB	
Applications		<ul style="list-style-type: none"> • High torque, high speed transmission • Machine tools • Textile machines • Grinder 		
Item		Description		Remarks
Specification	Construction			<ul style="list-style-type: none"> ① Black nitrile rubber (Glossy surface) ② Polyamide fabric ③ Polyester cord ④ Black nitrile rubber (Ground surface)
	Antistatic	Yes		
Dimensions	Width	5 to 400 [mm]		
	Length	128 to 4525 [mm]		By molds
	Thickness	1.7 [mm]		
	Joint	Seamless		
Properties	Tensile strength	235 [N/mm]		Test speed: 10%/min.
	Elongation at break	10 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.5 to 1 [%]		
	Tension at 1 [%]	29.4 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	35 [mm]		
	Operating temp.	-20 to +80 [°C]		
	Coefficient of friction	0.2 to 0.4(Steel) Glossy surface		Measurement condition: 7kPa,1mm/s
		0.4 to 0.8(Steel) Ground surface		Ambient condition: 23°C,50%R.H.
Mass	2.0 [kg/m ²]			
Features	<ul style="list-style-type: none"> • Wear resistance • Oil resistace 			