
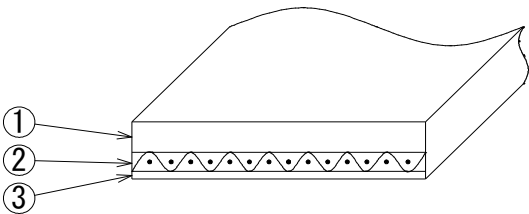


Technical Data Sheet		SEB™		
		Belt type	SE-F100-LBU	
Applications		<ul style="list-style-type: none"> <li>• Low torque transmission</li> <li>• Sandwich conveyance, Automatic teller machines</li> <li>• Automatic ticket gate</li> <li>• Automatic ticket machine</li> </ul>		
Item		Description		Remarks
Specification	Construction			①Black millable urethane rubber (Ground surface) ②Polyester seamless fabric ③Black millable urethane rubber (Glossy surface)
	Antistatic	Yes		
Dimensions	Width	5 to 200 [mm]		
	Length	98.5 to 1564 [mm]		By molds
	Thickness	1.0 [mm]		
	Joint	Seamless		
Properties	Tensile strength	39.2 [N/mm]		Test speed: 15 %/min.
	Elongation at break	13 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 to 3 [%]		
	Tension at 2%	3.9 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	15 [mm]		
	Operating temp.	-20 to +60 [°C]		
	Coefficient of friction	0.4 to 0.8(Paper) Ground surface 0.5 to 1.0(Steel) Glossy surface		Measurement condition: 7kPa,1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.0 [kg/m2]		
Features	<ul style="list-style-type: none"> <li>• Wear resistance</li> <li>• Crack resistance</li> <li>• Oil resistance</li> </ul>			