
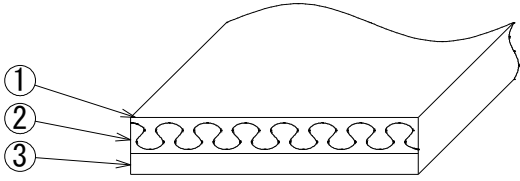


| Technical Data Sheet | | SEB™ | |  |
|----------------------|--|--|-----------|--|
| | | Belt type | SE-N-SMV2 | |
| Applications | | <ul style="list-style-type: none"> • Sandwich conveyance • Automatic teller machines | | |
| Item | | Description | | Remarks |
| Specification | Construction |  | | <ul style="list-style-type: none"> ① Black millable urethane rubber (Impregnated surface) ② Polyester seamless elastic knit ③ Black millable urethane rubber (Ground surface) |
| | Antistatic | Yes | | |
| Dimensions | Width | 8 to 200 [mm] | | |
| | Length | 80 to 1558 [mm] | | By molds |
| | Thickness | 0.65 [mm] | | |
| | Joint | Seamless | | |
| Properties | Tensile strength | 9.31 [N/mm] | | Test speed: 200 %/min. |
| | Elongation at break | 90 [%] | | Ambient condition: 23°C,50%R.H. |
| | Standard elongation | 3 to 7 [%] | | |
| | Tension at 5% | 0.59 [N/mm] | | Ambient condition: 23°C,50%R.H. |
| | Minimum pulley dia. | 8 [mm] | | |
| | Operating temp. | -20 to +60 [°C] | | |
| | Coefficient of friction | 0.3 to 0.6(Paper) Impregnated surface 0.4 to 0.8(Steel) Ground surface | | Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H. |
| | Mass | 0.8 [kg/m ²] | | |
| Features | <ul style="list-style-type: none"> • Elasticity • Easy installation • Low temperature resistance • Electric conductivity | | | |