
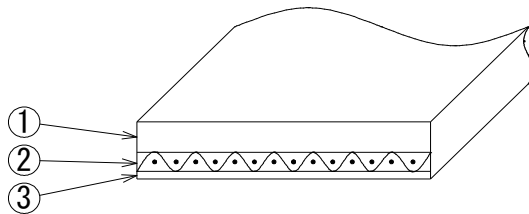


| Technical Data Sheet | | SEB™ | |  |
|----------------------|---|--|------------|--|
| | | Belt type | SE-G15-LBU | |
| Applications | | <ul style="list-style-type: none"> • Low and accurate torque transmission • Sandwich conveyance, Automatic teller machines • Sorters of copier equipment • Drivers for office automation equipment | | |
| Item | | Description | | Remarks |
| Specification | Construction |  | | ①Black millable urethane rubber (Ground surface) ②Polyester seamless fabric ③Black millable urethane rubber (Glossy surface) |
| | Antistatic | Yes | | |
| Dimensions | Width | 3 to 200 [mm] | | |
| | Length | 98.5 to 1564 [mm] | | By molds |
| | Thickness | 1.0 [mm] | | |
| | Joint | Seamless | | |
| Properties | Tensile strength | 8.83 [N/mm] | | Test speed: 15 %/min. |
| | Elongation at break | 20 [%] | | Ambient condition: 23°C,50%R.H. |
| | Standard elongation | 1 to 4 [%] | | |
| | Tension at 2% | 0.74 [N/mm] | | Ambient condition: 23°C,50%R.H. |
| | Minimum pulley dia. | 10 [mm] | | |
| | Operating temp. | -20 to +60 [°C] | | |
| | Coefficient of friction | 0.4 to 0.8(Paper) Ground surface 0.5 to 1.0(Steel) Glossy surface | | Measurement condition: 7kPa,1mm/s Ambient condition: 23°C,50%R.H. |
| | Mass | 1.0 [kg/m2] | | |
| Features | <ul style="list-style-type: none"> • Wear resistance • Crack resistance • Oil resistance | | | |

NITTA CORPORATION

Industrial Products Div.

The contents of this TDS may be changed without notice.