
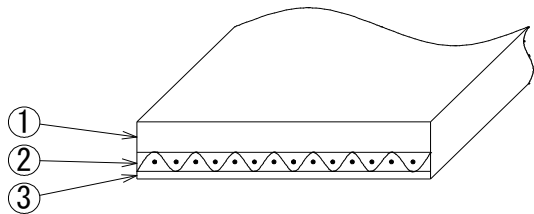


Technical Data Sheet		SEB™		
		Belt type	SE-G30-LGYU	
Applications		<ul style="list-style-type: none"> <li>• Pick / Stack belt</li> </ul>		
Item		Description		Remarks
Specification	Construction			① Gray millable urethane rubber (Ground surface) ② Polyester seamless fabric ③ Polyester seamless fabric (Glossy surface)
	Antistatic	Yes		
Dimensions	Width	5 to 200 [mm]		
	Length	98.5 to 1564 [mm]		By molds
	Thickness	1.75 [mm]		
	Joint	Seamless		
Properties	Tensile strength	17.7 [N/mm]		Test speed: 15 %/min.
	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 to 4 [%]		
	Tension at 2%	1.5 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	16 [mm]		
	Operating temp.	-20 to +60 [°C]		
	Coefficient of friction	0.8 to 1.2(Paper) Ground surface 0.5 to 1.0(Steel) Glossy surface		Measurement condition: 7kPa,1mm/s Ambient condition: 23°C,50%R.H.
	Mass	2.0 [kg/m <sup>2</sup> ]		
Features				