
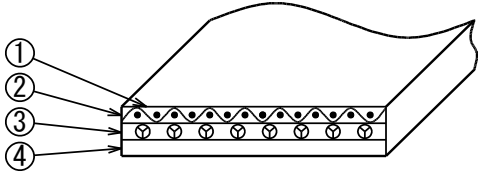


Technical Data Sheet		SEB™		
		Belt type	SE-XA-OBA	
Applications		<ul style="list-style-type: none"> • Low torque, high speed transmission 		
Item		Description		Remarks
Specification	Construction			<ul style="list-style-type: none"> ① Black nitrile rubber (Impregnated surface) ② Polyamide fabric ③ Polyester cord ④ Black nitrile rubber (Ground surface)
	Antistatic	Yes		
Dimensions	Width	5 to 400 [mm]		
	Length	128 to 4525 [mm]		By molds
	Thickness	1.0 [mm]		
	Joint	Seamless		
Properties	Tensile strength	29.4 [N/mm]		Test speed: 10%/min.
	Elongation at break	10 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.5 to 1 [%]		
	Tension at 1 [%]	3.7 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	15 [mm]		
	Operating temp.	-20 to +80 [°C]		
	Coefficient of friction	0.1 to 0.3(Steel) Impregnated surface 0.4 to 0.8(Steel) Ground surface		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	1.2 [kg/m ²]		
Features	<ul style="list-style-type: none"> • Wear resistance • Electric conductive • Appropriate slip 			