
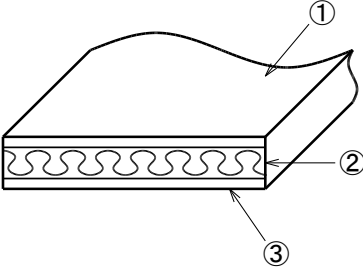


Technical Data Sheet		SEB™			
		Belt type	SE-N-LBU		
Applications		Sandwich conveyance Automatic teller machines			
Item		Description		Remarks	
Specification	Construction			①Black millable urethane rubber (Ground surface) ②Polyester seamless elastic knit ③Black millable urethane rubber (Glossy surface)	
	Antistatic	Yes			
Dimensions	Width	8 to 230 mm			
	Length	82.5 to 1565 mm		By mold:	
	Thickness	1 mm			
	Joint	Seamless			
Properties	Tensile strength	12.8 N/mm width		Test speed : 200 %/min.	
	Elongation at break	140 %		Ambient condition: 23°C,50%R.H.	
	Standard elongation	3 ~ 7 %			
	Tension at 5%	0.54 N/mm width		Ambient condition: 23°C,50%R.H.	
	Minimum pulley dia.	10 mm			
	Operating temp.	-20 to +60 °C			
	Coefficient of friction	Ground surface	0.4 to 0.8		Against a sheet of paper Ambient condition: 23°C,50%R.H.
		Glossy surface	0.5 to 1.0		Against stainless steel or aluminum Ambient condition: 23°C,50%R.H.
Mass	1.2 kg/m ²				
Features	Elasticity				
	Easy installation				
	Low temperature resistance				
	Electric conductivity				