
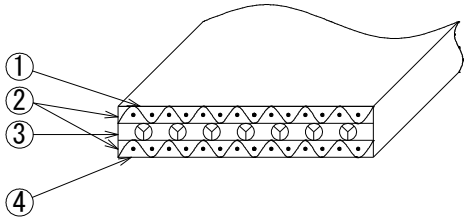


Technical Data Sheet		SEB™		
		Belt type	SE-GS-OC	
Applications		<ul style="list-style-type: none"> <li>• Low torque, high speed transmission</li> </ul>		
Item		Description		Remarks
Specification	Construction			<ul style="list-style-type: none"> <li>① Black chloroprene rubber (Impregnated surface)</li> <li>② Polyamide fabric</li> <li>③ Glass cord</li> <li>④ Black chloroprene rubber (Impregnated surface)</li> </ul>
	Antistatic	Yes		
Dimensions	Width	5 to 400 [mm]		
	Length	147 to 1563 [mm]		By molds
	Thickness	0.75 [mm]		
	Joint	Seamless		
Properties	Tensile strength	167 [N/mm]		Test speed: 10%/min.
	Elongation at break	3.4 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	0.2 to 0.4 [%]		
	Tension at 0.3 [%]	7.4 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	20 [mm]		
	Operating temp.	-20 to +80 [°C]		
	Coefficient of friction	0.1 to 0.3(Steel) Impregnated surface		Measurement condition: 7kPa, 1mm/s
		0.1 to 0.3(Steel) Impregnated surface		Ambient condition: 23°C,50%R.H.
Mass	1.0 [kg/m <sup>2</sup> ]			
Features	<ul style="list-style-type: none"> <li>• Wear resistance</li> <li>• Heat resistance</li> </ul>			