
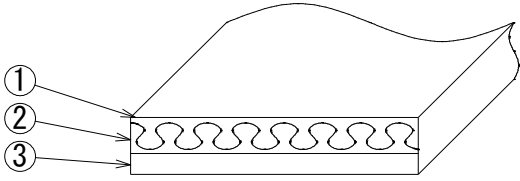


Technical Data Sheet		SEB™		
		Belt type	SE-N-SMV1	
Applications		<ul style="list-style-type: none"> <li>• Sandwich conveyance</li> <li>• Automatic teller machines</li> </ul>		
Item		Description		Remarks
Specification	Construction			<ul style="list-style-type: none"> <li>① Black millable urethane rubber (Impregnated surface)</li> <li>② Polyester seamless elastic knit</li> <li>③ Black millable urethane rubber (Ground surface)</li> </ul>
	Antistatic	Yes		
Dimensions	Width	8 to 200 [mm]		
	Length	80 to 1558 [mm]		By molds
	Thickness	0.65 [mm]		
	Joint	Seamless		
Properties	Tensile strength	6.86 [N/mm]		Test speed: 200 %/min.
	Elongation at break	100 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	3 to 7 [%]		
	Tension at 5%	0.44 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	8 [mm]		
	Operating temp.	-20 to +60 [°C]		
	Coefficient of friction	0.3 to 0.6(Paper) Impregnated surface 0.4 to 0.8(Steel) Ground surface		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	0.8 [kg/m <sup>2</sup> ]		
Features	<ul style="list-style-type: none"> <li>• Elasticity</li> <li>• Easy installation</li> <li>• Low temperature resistance</li> <li>• Electric conductivity</li> </ul>			