



Technical Datasheet	<i>PolySprint™</i> Belt type	Power Transmission and Conveyor Belt LA-4E14	PS-013 Ver.5
----------------------------	---------------------------------	---	--------------

Applications

- Bookbinding machine
- Right angle transfer / RAT
- Postal machine
- Packaging machine
- Light duty transmission

Construction

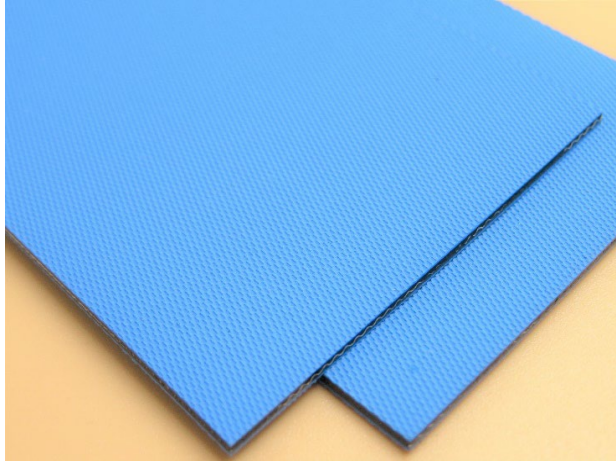

Top side	Bottom side
NBR	NBR
Textured surface	Textured surface
Blue	Blue
Tension member	Splice
Polyester	Finger
Fabric	(10×30)
Construction	

Dimensions

Width/Roll (max.)	500mm
Width/Endless (max.)	500mm
Length (max.)	100m
Total thickness	1.4mm
Weight	1.5 Kg/m ²

Please contact Nitta if you need other dimensions.

Regulatory compliance

RoHS(2011/65/EC,
(EU)2015/863)

Features

- Antistatic
- Roller bed
- Easy splice with NITTA tool

Properties

Minimum pulley diameter

Flexing	20mm
Finger	20mm
Back flexing	20mm
Finger	20mm

Dynamic properties

Standard elongation	1.0%
Tension after relaxation at 1.0% *	4.0N/mm
Initial tension at 2.0%	9.0N/mm
Tension after relaxation at 2.0% *	6.0N/mm
Operating temperature range	-20~60°C

*After 200hrs running-in

Tensile properties

Tensile strength	45N/mm
Elongation at break	13%
Maximum allowable tension	9.0N/mm
Maximum allowable elongation	2.0%

Coefficient of friction

Top	vs. Steel	0.5~0.6
	vs. Paper	0.6~0.7
Bottom	vs. Steel	0.5~0.6
	vs. Paper	0.6~0.7
	vs. Lagged pulley	0.7~0.9
	vs. POM (resin)	0.5~0.7