


<b>Technical Datasheet</b>	SEB™ Belt type	<b>SE-N-LBU</b>	SK-002 ver.1
----------------------------	-------------------	-----------------	--------------

### Applications

- ATM
- Sandwich insertion conveyor
- Banknote conveyor

### Construction

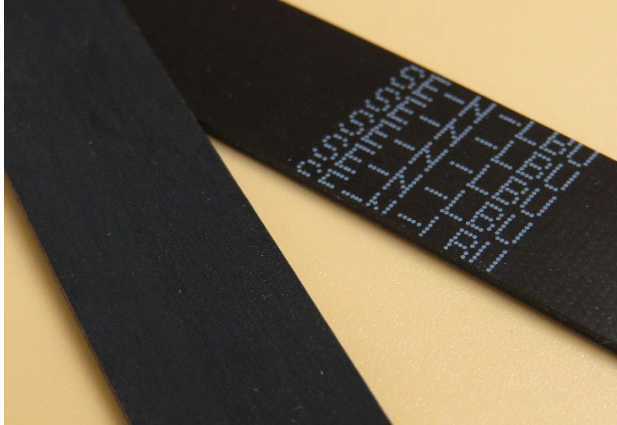

Ground side	Glossy side
Millable urethane rubber	Millable urethane rubber
Black	Black

\*Depending on application, both sides can be used.

Tension member	Splice
Polyester	Seamless
Seamless knit	

Construction 



### Dimensions

Width	8~200mm
Length	82.5~1565mm <small>*Depending on mold size</small>
Standard thickness	1.0mm
Range of thickness	-
Weight	1.2 kg/m <sup>2</sup>

Please contact Nitta if you need other dimensions.

### Regulatory compliance

RoHS(2011/65/EC),(EU)2015/863)

### Features

- Antistatic
- Superior elastic property
- Easy installation
- Operates in low temperatures
- High conductivity

### Properties

#### Dynamic properties

Standard elongation	5.0%
Tension after relaxation at 5.0%	0.49N/mm
Operation temperature range	-20~60°C

#### Minimum pulley diameter

When of standard thickness	10mm
----------------------------	------

#### Tensile properties

Tensile strength	11.8N/mm
Elongation at break	140%
Maximum allowable elongation	3.0~7.0%

#### Coefficient of friction

Ground side	vs. Paper	0.4~0.8
Glossy side	vs. Steel	0.5~1.0