
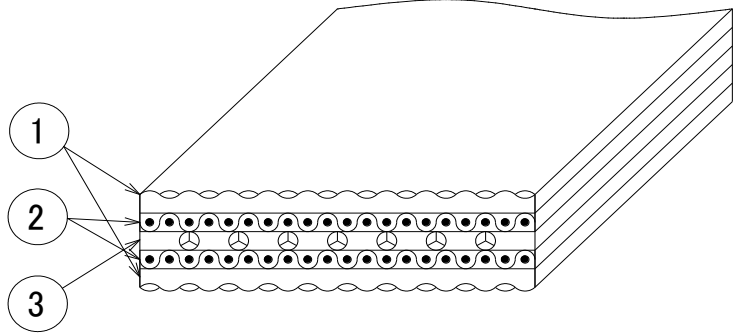


<b>Technical Data Sheet</b> <small>ZS-002</small>		<b>Zeroseam™</b> <small>Belt type</small> <b>ZS-TWM-46H</b>			
Applications		Tube Winder			
Item		Description		Remarks	
Specification	Construction			①NBR (Textured surface, Blue) ②Polyamide fabric ③Special cord	
	Antistatic	Yes			
Dimensions	Width	10 to 360 [mm]			
	Length	2,000 to 5,000 [mm]			
	Thickness	4.6 [mm]			
	Joint	Seamless			
Properties	Tensile strength	350 [N/mm]		Test speed: 50mm/min	
	Elongation at break	15 [%]		Ambient condition: 23°C,50%R.H.	
	Tension at 2% [Reference]	18 [N/mm] (after 200hours running-in)		Ambient condition: 23°C,50%R.H.	
	Minimum pulley dia.	φ75 [mm]			
	Operating temp.	-20 to +80 [°C]			
	Coefficient of friction	0.7 to 0.8 (Paper) Both side		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.	
	Mass	5.4 [kg/m <sup>2</sup> ]			
Features	Produce paper tube with low tension Energy saving Longer life				

**NITTA CORPORATION**
**Industrial Products Div.**

The contents of this TDS may be changed without notice.