
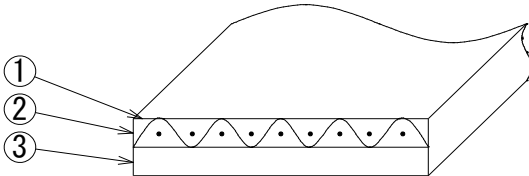


Technical Data Sheet		SEB™		
		Belt type	SE-G15-SBC1	
Applications		<ul style="list-style-type: none"> • Low and accurate torque transmission • Card reader drives • Sorters of copier equipment • Drivers for office automation equipment 		
Item		Description		Remarks
Specification	Construction			①Black chloroprene rubber (Smooth surface) ②Polyester seamless fabric ③Black chloroprene rubber (Glossy surface)
	Antistatic	Yes		
Dimensions	Width	3 to 200 [mm]		
	Length	98.5 to 1564 [mm]		By molds
	Thickness	0.43 [mm]		
	Joint	Seamless		
Properties	Tensile strength	8.83 [N/mm]		Test speed: 15 %/min.
	Elongation at break	20 [%]		Ambient condition: 23°C,50%R.H.
	Standard elongation	1 to 4 [%]		
	Tension at 2%	0.74 [N/mm]		Ambient condition: 23°C,50%R.H.
	Minimum pulley dia.	5 [mm]		
	Operating temp.	-20 to +80 [°C]		
	Coefficient of friction	0.4 to 0.9(Paper) Smooth surface 0.4 to 0.9(Steel) Glossy surface		Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.
	Mass	0.45 [kg/m ²]		
Features	<ul style="list-style-type: none"> • Crack resistance • Environmental resistance • Electric conductivity 			

NITTA CORPORATION

Industrial Products Div.

The contents of this TDS may be changed without notice.